

Price List Effective Dates:

Pricing	10.03.22
Revisions	09.01.22




▶ See page

Statement of Line	TX.2
Planning	TX.3
Features Overview	TX.3
Traxx & Tiles Product Info	TX.4
Installation & Application	TX.5
Pricing	TX.6
Traxx Components	TX.6
Tiles	TX.7
Presentation Rail	TX.11
End Trim and Trim Caps	TX.12
Trim Channels	TX.13
Vertical Cable Managers	TX.13
Traxx Brackets	TX.14
Spacers	TX.14
Surface Materials	TX.15
Paint	TX.15
Fabric	TX.16
COM Yardage	TX.17


TRAXX® & TILES WALL SYSTEM

Statement of Line


Statement of Line	➤ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15




Traxx
➤ See page TX.6 to specify.




Fastener Concealment
➤ See page TX.6 to specify.



Fabric Tiles
➤ See page TX.7.




Markerboard Tiles
➤ See page TX.8.

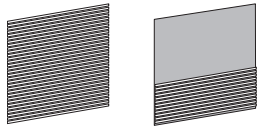

Slat Tiles
➤ See pages TX.9 – TX.10 to specify.




Presentation Rail
➤ See page TX.11 to specify.




End Trim
➤ See page TX.12 to specify.



Trim Caps
➤ See page TX.12 to specify.



Trim Channels and Vertical Cable Manager
➤ See page TX.13 to specify.



Attachment Bracket Kits
➤ See page TX.14 to specify.

TRAXX® & TILES WALL SYSTEM

Overview

Planning


Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

Traxx is a unique horizontal rail system that attaches to existing architecture, allowing free, off-module placement of Kimball components. Place storage, worksurfaces, tiles and panels wherever you need them.

Upper Traxx can be mounted to correspond with appropriate panel heights or at 80"H for conference room applications.

Tiles mount between upper and lower Traxx to add functionality to the workspace.

Worksurfaces can be mounted to lower Traxx.

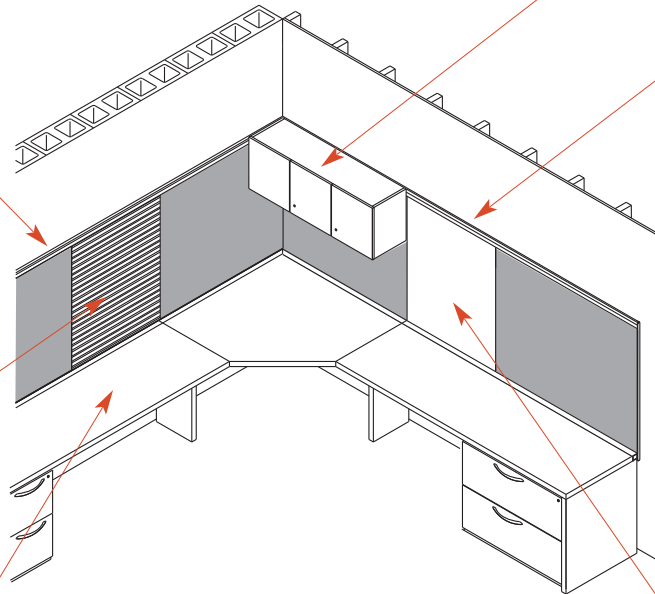

Overhead storage can be mounted to upper Traxx.

Traxx can be mounted to most interior walls, including steel or wood stud walls, masonry block, or solid masonry walls.

Fabric and standard markerboard tiles can be scribed in the field to meet individual requirements.

Related Products:

Vertical cable manager is available to route cords. It is available in fabric or black plastic.
▶ See page TX.13.

Paper Management/
Work Tools

▶ See the Perks Work Tools chapter the *Kimball Accessory Solutions Price List*.

If Traxx and tiles aren't required, the Footprint wall-mount worksurface bracket may be used to attach worksurfaces directly to drywall or studs.

▶ See the Footprint Worksurfaces and Support chapter in the *Kimball Systems Solutions Price List*.


TRAXX® & TILES WALL SYSTEM

Product Information

Planning

Statement of Line	▶See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

Details



Traxx is available in lengths of 72" and 144", and can be scribed in the field. Traxx models include:

- Two Traxx (72" or 144")
- Four splice plates

Tiles are available in fabric, slat, or markerboard models. Fabric and standard markerboard tiles can be scribed in the field. Tile models include:

- Tile
- Two trim channels

Markerboard tiles add convenient, erasable writing space and are ideal for offices, training rooms, and conference areas. Available in laminate or magnetic porcelain.

Slat tiles offer flexibility in placement of work tools. Selecting the slat tile with fabric above is an economical alternative when overhead storage will be used.

Two trim channels, standard with each tile, provide an expansion joint, wire manager attachment, and compensate for out-of-plumb walls. Additional trim channels are available, if required, for tiles that have been scribed in the field.

Surface Materials

Traxx

- Paint

End Trim

- Paint

Trim Cap

- Paint
- Wood finishes


Tiles

- Fabric
- Slat: paint
- Markerboard:
 - 409M Icy White or
 - 483M Off White

Trim Channels


- Fabric
- Paint

Connections




Traxx are mounted horizontally permitting complete tie-in to all studs.

No additional blocking is required to support Traxx, if walls are designed and built to specifications outlined. ▶See page TX.5 for application guidelines.



Fastener concealment is used to conceal splice plates and fasteners. It does not interfere with mounted components and does not require any additional tools for installation. Fastener concealment is available in vinyl or felt. Vinyl must be specified when using presentation tools.



Splice plates are required to align two sections of Traxx in-line or when turning corners. They are easily modified in the field to accommodate angles or corners.

Planning Factors

Traxx can be mounted at any height if not corresponding to other products. ▶See page TX.5 for mounting heights to correspond to panel applications.

To custom paint Traxx in the field, specify 480 Antique White. Schedule delivery to precede the rest of the order to provide time for painting. Traxx should be lightly sanded before painting. Enamel based paints are recommended.

Traxx and tiles, excluding porcelain markerboard) can be scribed in the field to the desired size.

Related Products:

Traxx panel starter kits allow attachment of a panel anywhere along Traxx.

Full end trim is available to finish the end of tile between upper and lower Traxx.

Panel-height full end trims are available for use with Traxx panel starter kit.

Single end trim finishes the end of a single Traxx rail, if stopping Traxx short of an intersecting wall.

Trim cap slips into the top ledge of the upper Traxx to provide continuity with panel heights. ▶See page TX.12.



Presentation rail is 36"W and can be used on the lower Traxx to hold presentation materials. It can also be used as an eraser tray. End caps allow two rails to be joined together to create a longer display surface. A smooth transition is accomplished by removing one end cap and inserting the exposed rail into the end cap of another rail. Black finish.

TRAXX® & TILES WALL SYSTEM

Installation & Application Guidelines


Planning

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

Installation Heights:

Traxx should be installed at heights to correspond with the appropriate application.


Compatible with Cetra, Narrate, and Xsite:



Overhead Cabinets	66 ⁷ / ₈ "H
Worksurfaces	28 ¹ / ₂ "H
Conferencing Solutions	78 ⁷ / ₈ "H


Note: 37"H tiles coordinate with Cetra, Narrate, and Xsite 68"H applications.

Compatible with Interworks EQ:



Overhead Cabinets	65 ¹ / ₂ "H
Worksurfaces	28 ¹ / ₂ "H
Conferencing Solutions	78 ⁷ / ₈ "H


Note: 36"H tiles coordinate with Interworks EQ 66"H applications.



Determine proper position of Traxx using centerline of lower Traxx as a reference point.

Actual mounting height can be varied to meet specific needs; however, undersurface storage height must be considered.

Variations in the floor surface (peaks and valleys) should be considered, especially where horizontal placement is critical.




Traxx extends 3/4" from the wall. This dimensional loss should be considered when space planning for components, when Traxx are being used on 2 or more walls of a space.

When planning components for the entire length of the wall, total length of storage components should be a minimum of 1 1/2" less than the total length of the wall. Filler panels may be specified to fill any remaining space.

Select worksurfaces and tiles can be field scribed to fit space.

In fixed wall Traxx applications, choose your tile height based on your specific application. Consider the height of the cabinet and clearance between the bottom of the overhead and the worksurface.

Recommended Fasteners:



Fasteners must tie in directly to the substructure of a structural wall for proper attachment of Traxx. Kimball defines a structural wall as a loadbearing wall constructed of materials such as poured concrete, concrete block, or studs.

Selection and purchase of the proper attachment fasteners for your wall conditions is the responsibility of the installer.

Type and Size	Commercial Model #
Steel studs (1/2" to 3/4" drywall)	
Hilti® Toggler® anchor toggle bolts, 1/4"-20 x 2" grade 5 bolts	374494
Wood studs (1/4" to 1/2" drywall) Meets or exceeds ANSI/ASME B18.6.4 and SAE J933.	
Pan head sheet metal screw	10-2 PHPMS
Solid Masonry	
Crown Bolt lag shields 1/4" x 1 1/2"	
Buildex Tapcon concrete anchor screw 1/4" x 2 3/4"	24385
Masonry Block	
Hilti Toggler anchor toggle bolts, 1/4"-20 x 2" grade 5 bolts	374494
Crown Bolt lag shields 1/4" x 1 1/2"	
Buildex Tapcon concrete anchor screw 1/4" x 2 3/4"	24385

▶ See assembly instructions at www.kimball.com.

Minimum Requirements:

- Wood studs must be nominal 2" x 4" minimum.
- Metal studs must be "C" channel, 20 gauge minimum thickness.
- Metal or wood studs must be on centers no greater than 24" and have a maximum height of 14' restrained at floor and ceiling.
- Interior walls must be designed to resist not less than a force of 5 lbs. per sq. ft. applied perpendicular to the wall. The deflection of such walls under a load of 5 lbs. per square foot shall not exceed 1/240 of the span for walls with brittle finishes and 1/120 of the span for walls with flexible finishes (per International Building Code sections 1604.4 and 1607.13).
- Traxx may not extend more than 6" beyond the last solid attachment point.
- Minimum width of Traxx that can be attached to a wall is 16" mounted to studs 16" apart.
- If an overhead is being mounted, the minimum width for Traxx is 24" with the Traxx being centered on studs 16" apart, so as not to extend more than 6" beyond the last solid attachment point.




TRAXX® & TILES WALL SYSTEM

Traxx Components

Pricing

GSA SIN 33721

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
Traxx				
1 ¹ / ₁₆ "	72"	2"	TTWMT72	\$523
	144"		TTWMT144	750
Splice Plates				
	4"	7/8"	TTSP04	\$17
Fastener Concealment				
Black Vinyl				
	700"	7/8"	TTCS	\$89
Black Felt				
	700"	7/8"	TTCFC	\$50

Traxx can be cut to size in the field.

IMPORTANT: Specify vinyl fastener concealment when using presentation tools. Accommodates two sets of Traxx.

Four splice plates are included with each set of Traxx. Specify additional splice plates only if needed for your installation.

Trim Channels
▶ See page TX.13.

Overhead Mounting Brackets
▶ See page TX.14.

Standard Includes

Traxx

- Set of 2 Traxx
- Four splice plates

Splice Plates

- Set of 4 plates

Fastener Concealment

- Roll: black vinyl or black felt

How to Specify

Traxx


- ① Model
- ② Finish price group:
STD = Group 1
STD M = Group M (+10%)
- ③ Finish designator

Splice Plates or Fastener Concealment

- ① Model

TRAXX® & TILES WALL SYSTEM

Fabric Tiles



IMPORTANT: 37"H tiles correspond to 68"H Xsite and Cetra panels; 36"H tiles correspond to 66"H Interworks EQ panels; 49"H tiles are compatible with 80"H conference room applications.

Tiles can be field scribed. Additional trim channels should be specified separately if additional tiles are created.

▶See page TX.13.

Railroaded fabric option is available on 37"H tiles compatible with Xsite tiles. Fabric is turned 90° and applied to the tile when this option is selected.

Pricing

GSA SIN 33721
COM GSA Non-Contract

Statement of Line	▶See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

D	W	H	Model	Fabric Price Grade	
				A	B/COM
36"H Tiles					
1/2"	12"	35 1/2"	HIT1236A	\$408	\$455
	18"		HIT1836A	454	501
	24"		HIT2436A	469	516
	30"		HIT3036A	548	595
	36"		HIT3636A	564	611
	42"		HIT4236A	581	628
	48"		HIT4836A	602	649
	54"		HIT5436A	659	706
	60"		HIT6036A	667	762
37"H Tiles					
1/2"	12"	36 7/8"	FIT1237A	\$421	\$450
	18"		FIT1837A	461	499
	24"		FIT2437A	481	523
	30"		FIT3037A	563	613
	36"		FIT3637A	581	631
	42"		FIT4237A	600	650
	48"		FIT4837A	616	666
	54"		FIT5437A	683	733
	60"		FIT6037A	689	756
49"H Tiles					
1/2"	12"	48 7/8"	FIT1249A	\$474	\$503
	18"		FIT1849A	528	566
	24"		FIT2449A	556	598
	30"		FIT3049A	649	699
	36"		FIT3649A	657	707
	42"		FIT4249A	684	734
	48"		FIT4849A	705	755
	54"		FIT5449A	782	832
	60"		FIT6049A	788	855

Standard Includes

- Fabric tile
- 2 matching trim channels

How to Specify

- ① Model
- ② Railroaded fabric option
(omit for 36"H tiles):
Y = Yes
N = No
- ③ Fabric grade
- ④ Fabric number

TRAXX® & TILES WALL SYSTEM

Markerboard Tiles



IMPORTANT: 37"H tiles correspond to 68"H Xsite and Cetra panels; 36"H tiles correspond to 66"H Interworks EQ panels; 49"H tiles are compatible with 80"H conference room applications.

Tiles can be field scribed (excluding porcelain markerboard). Additional trim channels should be specified separately if additional tiles are created.

Expo dry erase markers are recommended for use on markerboards. All other dry erase markers are not recommended, as they may leave undesirable results when erased.

Trim Channels

►See page TX.13.

Pricing

GSA SIN 33721

Statement of Line	►See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

D	W	H	Laminate		Magnetic Porcelain	
			Model	Price	Model	Price
36"H Tiles						
1/2"	24"	35 1/2"	HIT2436M	\$829	—	—
		30"	HIT3036M	832	—	—
		36"	HIT3636M	935	—	—
		42"	HIT4236M	1007	—	—
		48"	HIT4836M	1217	—	—
		54"	HIT5436M	1224	—	—
		60"	HIT6036M	1236	—	—
37"H Tiles						
1/2"	24"	36 7/8"	FIT2437M	\$857	FIT2437PMM	\$894
		30"	FIT3037M	859	FIT3037PMM	899
		36"	FIT3637M	961	FIT3637PMM	1037
		42"	FIT4237M	1035	FIT4237PMM	1040
		48"	FIT4837M	1256	FIT4837PMM	1431
		54"	FIT5437M	1264	FIT5437PMM	1445
		60"	FIT6037M	1271	FIT6037PMM	1465
49"H Tiles						
1/2"	24"	48 7/8"	FIT2449M	\$1000	FIT2449PMM	\$1087
		30"	FIT3049M	1004	FIT3049PMM	1097
		36"	FIT3649M	1117	FIT3649PMM	1256
		42"	FIT4249M	1213	FIT4249PMM	1381
		48"	FIT4849M	1466	FIT4849PMM	1723
		54"	FIT5449M	1473	FIT5449PMM	2056
		60"	FIT6049M	1484	FIT6049PMM	2251

Standard Includes

Laminate Markerboard

- Markerboard tile: Icey White or Off White laminate
- 2 complementary trim channels

Magnetic Porcelain

- Magnetic porcelain tile: white
- 2 complementary trim channels

How to Specify

- 1 Model
- 2 Laminate finish designator (omit for porcelain markerboard):
409M Icey White
483M Off White




TRAXX® & TILES WALL SYSTEM

Slat Tiles | 36"H Compatible with the Heights of Interworks EQ Panels

Pricing

GSA SIN 33721
COM GSA Non-Contract

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15



D	W	H	Model	Price	Fabric Price Grade	
					A	B/COM
Full Slat Tile						
1/2"	24"	35 1/2"	HIT2436SS36P	\$2173	—	—
		30"	HIT3036SS36P	2185	—	—
		36"	HIT3636SS36P	2494	—	—
		42"	HIT4236SS36P	2497	—	—
		48"	HIT4836SS36P	2771	—	—
16"H Slat and 20"H Fabric						
1/2"	24"	35 1/2"	HIT2436SS16	—	\$1759	\$1793
		30"	HIT3036SS16	—	1768	1802
		36"	HIT3636SS16	—	2019	2053
		42"	HIT4236SS16	—	2023	2057
		48"	HIT4836SS16	—	2251	2285
24"H Slat and 12"H Fabric						
1/2"	24"	35 1/2"	HIT2436SS24	—	\$1957	\$1982
		30"	HIT3036SS24	—	1966	1991
		36"	HIT3636SS24	—	2243	2268
		42"	HIT4236SS24	—	2251	2276
		48"	HIT4836SS24	—	2495	2520



Grooves are
1/2" each
Slats are 1"H

One single monitor arm can be accommodated per full slat tile.

Work Tools and Monitor Arms
▶ See the Perks Work Tools and Technology Management sections in the *Kimball Accessory Solutions Price List*.

Trim Channels
▶ See page TX.13.

Standard Includes

- Tile
- 2 matching trim channels

How to Specify

Full Slat Tiles

- 1 Model
- 2 Finish price group:
STD = Group 1
STD M = Group M (+10%)
- 3 Finish designator

Slat and Fabric Tiles

- 1 Model
- 2 Trim channel option:
N = Fabric trim channel
P = Painted trim channel
- 3 Fabric grade
- 4 Fabric number
- 5 Finish price group:
STD = Group 1
STD M = Group M (+10%)
- 6 Finish designator




TRAXX® & TILES WALL SYSTEM

Slat Tiles | 37"H Compatible with the Heights of Xsite or Cetra Panels

Pricing

GSA SIN 33721
COM GSA Non-Contract

Statement of Line	▶See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15



D	W	H	Model	Price	Fabric Price Grade	
					A	B/COM
Full Slat Tile						
1/2"	24"	36 7/8"	FIT2437SS37P	\$2173	—	—
		30"	FIT3037SS37P	2185	—	—
		36"	FIT3637SS37P	2494	—	—
		42"	FIT4237SS37P	2497	—	—
		48"	FIT4837SS37P	2771	—	—
16"H Slat and 21"H Fabric						
1/2"	24"	36 7/8"	FIT2437SS16	—	\$1759	\$1793
		30"	FIT3037SS16	—	1768	1802
		36"	FIT3637SS16	—	2019	2053
		42"	FIT4237SS16	—	2023	2057
		48"	FIT4837SS16	—	2251	2285
24"H Slat and 13"H Fabric						
1/2"	24"	36 7/8"	FIT2437SS24	—	\$1957	\$1982
		30"	FIT3037SS24	—	1966	1991
		36"	FIT3637SS24	—	2243	2268
		42"	FIT4237SS24	—	2251	2276
		48"	FIT4837SS24	—	2495	2520



Grooves are
1/2" each
Slats are 1"H

One single monitor arm can be accommodated per full slat tile.

Work Tools and Monitor Arms
▶See the Perks Work Tools and Technology Management sections in the *Kimball Accessory Solutions Price List*.

Trim Channels
▶See page TX.13.

Standard Includes

- Tile
- 2 matching trim channels

How to Specify

Full Slat Tile

- 1 Model
- 2 Finish price group:
STD = Group 1
STDM = Group M (+10%)
- 3 Finish designator

Slat or Fabric Tile

- 1 Model
- 2 Trim channel option:
N = Fabric trim channel
P = Painted trim channel
- 3 Railroaded fabric option:
Y = Yes
N = No
- 4 Fabric grade
- 5 Fabric number
- 6 Finish price group:
STD = Group 1
STDM = Group M (+10%)
- 7 Finish designator


TRAXX® & TILES WALL SYSTEM

Presentation Rail

Pricing

GSA SIN 33721

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
Presentation Rail				
3"	36"	2½"	FPR36 Cinder	\$233

Standard Includes

- End caps

How to Specify




- 1 Model

TRAXX® & TILES WALL SYSTEM

End Trim & Trim Caps

Pricing
GSA SIN 33721

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
Full End Trim				
<i>For use with 37"H Cetra Tiles</i>				
1 1/16"	1 1/2"	40"	TTET40	\$152
<i>For Use with 36"H Interworks EQ Tiles</i>				
1 1/16"	1 1/2"	39"	TTET39	\$144
<i>For Use with 49"H Conferencing Solutions Tiles</i>				
1 1/16"	1 1/2"	52"	TTET52	\$176
Single End Trim				
1 1/16"	1 1/2"	2"	TTET02	\$59
Trim Caps				
Wood				
9/16"	72"	15/16"	TTC72W	\$171
Paint				
9/16"	72"	15/16"	TTC72P	171

Specify end trim for finish detail when end of Traxx and tiles are exposed. Use full end trim to cover the exposed edge of tile and upper and lower Traxx. Use single end trim to cover the end of a single Traxx.

Trim cap slips into the top ledge of the upper Traxx to add finishing detail for Traxx applications.

Full end trim may be used for finish detail when end of wall mounted overhead is exposed.

Standard Includes

- End trim or trim cap

How to Specify


- ① Model
- ② Finish price group:
STD = Group 1
STDM = Group M (+10%)
- ③ Finish designator

TRAXX® & TILES WALL SYSTEM

Trim Channels & Vertical Cable Managers

Pricing
GSA SIN 33721

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15



D	W	H	Model	Description	Price
Trim Channels					
For Use with 37"H Xsite or Cetra Tiles					
1/2"	3/4"	35 7/8"	TTTC37N	Fabric; one trim channel	\$91
			TTTC37P	Paint; one trim channel	77
For Use with 36"H Interworks EQ Tiles					
1/2"	3/4"	35 7/8"	TTTC36N	Fabric; one trim channel	\$89
			TTTC36P	Paint; one trim channel	73
For Use with 49"H Conferencing Solutions Tiles					
1/2"	3/4"	48 7/8"	TTTC49N	Fabric; one trim channel	\$103
			TTTC49P	Paint; one trim channel	100
Vertical Cable Managers					
For Use with Standard-Height Square or Radius Profile Overheads and 37"H Tiles					
1"	1"	18 3/4"	TTVCM19B	Black	\$53
			TTVCM19N	Fabric	73
For Use with Bevel or Reduced-Height Square and Radius Profile Overheads and 37"H Tiles; or Bevel Profile Overheads and 36"H Tiles					
1"	1"	19 1/2"	TTVCM20B	Black	\$53
			TTVCM20N	Fabric	69

Trim channels are provided with all tiles. Specify only if additional trim channels are required.

Vertical cable manager engages between the tile and trim channel.

Railroaded fabric option is available on 37"H and 49"H trim channels or 37"H vertical cable managers for use with Xsite.

Standard Includes

- Trim channel or cable manager

How to Specify

Trim Channels

- 1 Model
- 2 Railroaded fabric option (applies to TTTC37N and TTTC49N only):
Y = Yes
N = No
- 3 If paint, finish price group:
STD = Group 1
STDM = Group M (+10%)
If fabric, fabric grade
- 4 Finish designator or fabric number

Vertical Cable Managers

- 1 Model
- 2 Railroaded fabric option (applies to TTVCM19N only):
Y = Yes
N = No
- 3 Fabric grade (include for fabric models only)
- 4 Fabric number (include for fabric models only)


TRAXX® & TILES WALL SYSTEM

Brackets & Traxx Spacers


Pricing

GSA SIN 33721

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15



D	W	H	Model	Description	Price
Worksurface Bracket					
			IBTWS	Single bracket; black.	\$25




Overhead Bracket					
For Use with Radius and Square Profile Overhead Storage Units					
			FBOTS	Single bracket; black. Specify two brackets for use with 24"W-48"W overheads; specify four brackets for use with 60"W-72"W overheads	\$32




For Use with Bevel and Flat Profile Overhead Storage Units					
1 1/8"	3 5/8"	16 5/8"	ISBRKT	Set of 2; one set required per overhead.	\$56

Traxx Spacers



For use with Radius and Square Profile Overhead Storage Units					
5/8"	71 13/16"	1"	TTBS72	One 72"L section; black.	\$45



For use with Bevel and Flat Profile Overhead Storage Units					
1/2"	3 3/8"	14 1/8"	ISBRKTSO	Set of 2; one set required per overhead.	\$112

Standard Includes

- Bracket(s)

How to Specify

Overhead Brackets and Traxx Spacers for Use with Bevel or Flat Profile Overheads

- ① Model
- ② Finish price group:
STD = Group 1
STDM = Group M (+10%)
- ③ Finish designator

All others

- ① Model

Specify Traxx spacer when Traxx mounting overheads without tiles.
 ▶ See the Footprint Storage chapter in the *Kimball Systems Solutions Price List*.

TRAXX® & TILES WALL SYSTEM

Paint

Surface Materials

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

Applies to:

- Traxx
- End trim
- Trim channels
- Trim caps
- Slat tiles
- Brackets for bevel and flat profile overheads
- Traxx spacers for bevel or flat profile overheads

Group 1

480	Antique White
427	Barley
437	Cement
403	Chamois
462	Cinder
440	Cloud
485	Dark Chocolate
405	Designer White
453	Environmental Grey
459	Featherstone
450	Fog
488	Frosty White
461	Graphite
445	Moon Beam
416	Putty
420	Sandstone
425	Shadow
465	Smoke
460	Storm
429	Tantalum
419	Wallaby

Group M

514	Carbon Metallic
507	Patina Metallic
501	Platinum Metallic
505	Satin Bronze Metallic
544	Silver Pearl
504	Taupe Metallic

Applies to:

- Worksurface brackets
- Brackets for radius and square profile overheads
- Traxx spacers for radius and square profile overheads

Group 1

462	Cinder
-----	--------

- ▶ See the *Surface Materials Reference Guide* at www.kimball.com for a complete overview of the Kimball materials program, including:
- Characteristics of wood
 - Special wood finishes
 - Customer-specified laminate (CSL)
 - Customer-specified paint (CSP)
 - Fabric application and colorways
 - Customer's own material (COM) overview
 - Alliance program
 - TB133 process

IMPORTANT: Due to the reflective qualities of metallic paint, variations in color may occur.

Customer-specified paint (CSP) is available.

- ▶ See the *Surface Materials Reference Guide* at www.kimball.com.

TRAXX® & TILES WALL SYSTEM

Fabric

Surface Materials

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

Applies to:

- Fabric tiles
- Slat/fabric combination tiles
- Trim channels
- Vertical cable managers

Kimball Panel Fabric

Price Grades A–B

▶ See the *Surface Materials Reference Guide* at www.kimball.com for the most up-to-date list of available panel fabric patterns.

- ▶ See the *Surface Materials Reference Guide* at www.kimball.com for a complete overview of the Kimball materials program, including:
- Characteristics of wood
 - Special wood finishes
 - Customer-specified laminate (CSL)
 - Customer-specified paint (CSP)
 - Fabric application and colorways
 - Customer's own material (COM) overview
 - Alliance program
 - TB133 process

TRAXX® & TILES WALL SYSTEM

COM Yardage Requirements

Surface Materials

GSA Non-Contract

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15

Kimball has analyzed each model to most accurately reflect the yardage requirements.

The yardage requirement for each model is listed for 66"W directional, 66"W non-directional, and 54"W directional, where applicable.

Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.
36"H Tiles			37"H Tiles			49"H Tiles					
HIT1236A	1.2	1.2	0.7	FIT1237A	1.2	1.2	0.7	FIT1249A	1.6	1.6	0.7
HIT1836A	1.2	1.2	0.9	FIT1837A	1.2	1.2	0.9	FIT1849A	1.6	1.6	0.9
HIT2436A	1.2	1.2	1.0	FIT2437A	1.2	1.2	1.0	FIT2449A	1.6	1.6	1.0
HIT3036A	1.2	1.2	1.2	FIT3037A	1.2	1.2	1.2	FIT3049A	1.6	1.6	1.2
HIT3636A	1.2	1.2	1.2	FIT3637A	1.2	1.2	1.2	FIT3649A	1.6	1.6	1.2
HIT4236A	1.2	1.2	1.2	FIT4237A	1.2	1.2	1.2	FIT4249A	1.6	1.6	1.2
HIT4836A	1.2	1.2	1.2	FIT4837A	1.2	1.2	1.2	FIT4849A	1.6	1.6	1.2
HIT5436A	1.2	N.A.	1.2	FIT5437A	1.2	N.A.	1.2	FIT5449A	1.6	N.A.	1.2
HIT6036A	2.4	N.A.	1.6	FIT6037A	2.4	N.A.	1.6	FIT6049A	3.2	N.A.	1.6
HIT2436SS16N	0.8	0.8	0.8	FIT2437SS16N	0.8	0.8	0.8				
HIT2436SS16P	0.8	0.8	0.8	FIT2437SS16P	0.8	0.8	0.8				
HIT2436SS24N	0.6	0.6	0.6	FIT2437SS24N	0.6	0.6	0.6				
HIT2436SS24P	0.6	0.6	0.6	FIT2437SS24P	0.6	0.6	0.6				
HIT3036SS16N	0.8	0.8	0.8	FIT3037SS16N	0.8	0.8	0.8				
HIT3036SS16P	0.8	0.8	0.8	FIT3037SS16P	0.8	0.8	0.8				
HIT3036SS24N	0.6	0.6	0.6	FIT3037SS24N	0.6	0.6	0.6				
HIT3036SS24P	0.6	0.6	0.6	FIT3037SS24P	0.6	0.6	0.6				
HIT3636SS16N	0.8	0.8	0.8	FIT3637SS16N	0.8	0.8	0.8				
HIT3636SS16P	0.8	0.8	0.8	FIT3637SS16P	0.8	0.8	0.8				
HIT3636SS24N	0.6	0.6	0.6	FIT3637SS24N	0.6	0.6	0.6				
HIT3636SS24P	0.6	0.6	0.6	FIT3637SS24P	0.6	0.6	0.6				
HIT4236SS16N	0.8	0.8	0.8	FIT4237SS16N	0.8	0.8	0.8				
HIT4236SS16P	0.8	0.8	0.8	FIT4237SS16P	0.8	0.8	0.8				
HIT4236SS24N	0.6	0.6	0.6	FIT4237SS24N	0.6	0.6	0.6				
HIT4236SS24P	0.6	0.6	0.6	FIT4237SS24P	0.6	0.6	0.6				
HIT4836SS16N	0.8	0.8	0.8	FIT4837SS16N	0.8	0.8	0.8				
HIT4836SS16P	0.8	0.8	0.8	FIT4837SS16P	0.8	0.8	0.8				
HIT4836SS24N	0.6	0.6	0.6	FIT4837SS24N	0.6	0.6	0.6				
HIT4836SS24P	0.6	0.6	0.6	FIT4837SS24P	0.6	0.6	0.6				

How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

If you specify different panel fabrics for opposite sides of a panel, additional yardage may be required.

▶ Contact Customer Care.

If COM fabric is to be "railroaded," contact Customer Care for yardage requirements.

▶ See the *Kimball Surface Materials Reference Guide* at www.kimball.com for COM policy and additional information.

TRAXX® & TILES WALL SYSTEM

Notes

Statement of Line	▶ See page TX.2
Planning	TX.3
Pricing	TX.6
Surface Materials	TX.15